



UC Berkeley
Teaching Professor
Dan Garcia

CS61C

Great Ideas
in
Computer Architecture
(a.k.a. Machine Structures)



UC Berkeley
Professor
Bora Nikolić

Caches II

Direct Mapped Caches




Direct-Mapped Cache (1/4)


- In a **direct-mapped cache**, each memory address is associated with one possible **block** within the cache
 - Therefore, we only need to look in a single location in the cache for the data if it exists in the cache
 - Block is the unit of transfer between cache and memory




Direct-Mapped Cache (2/4)

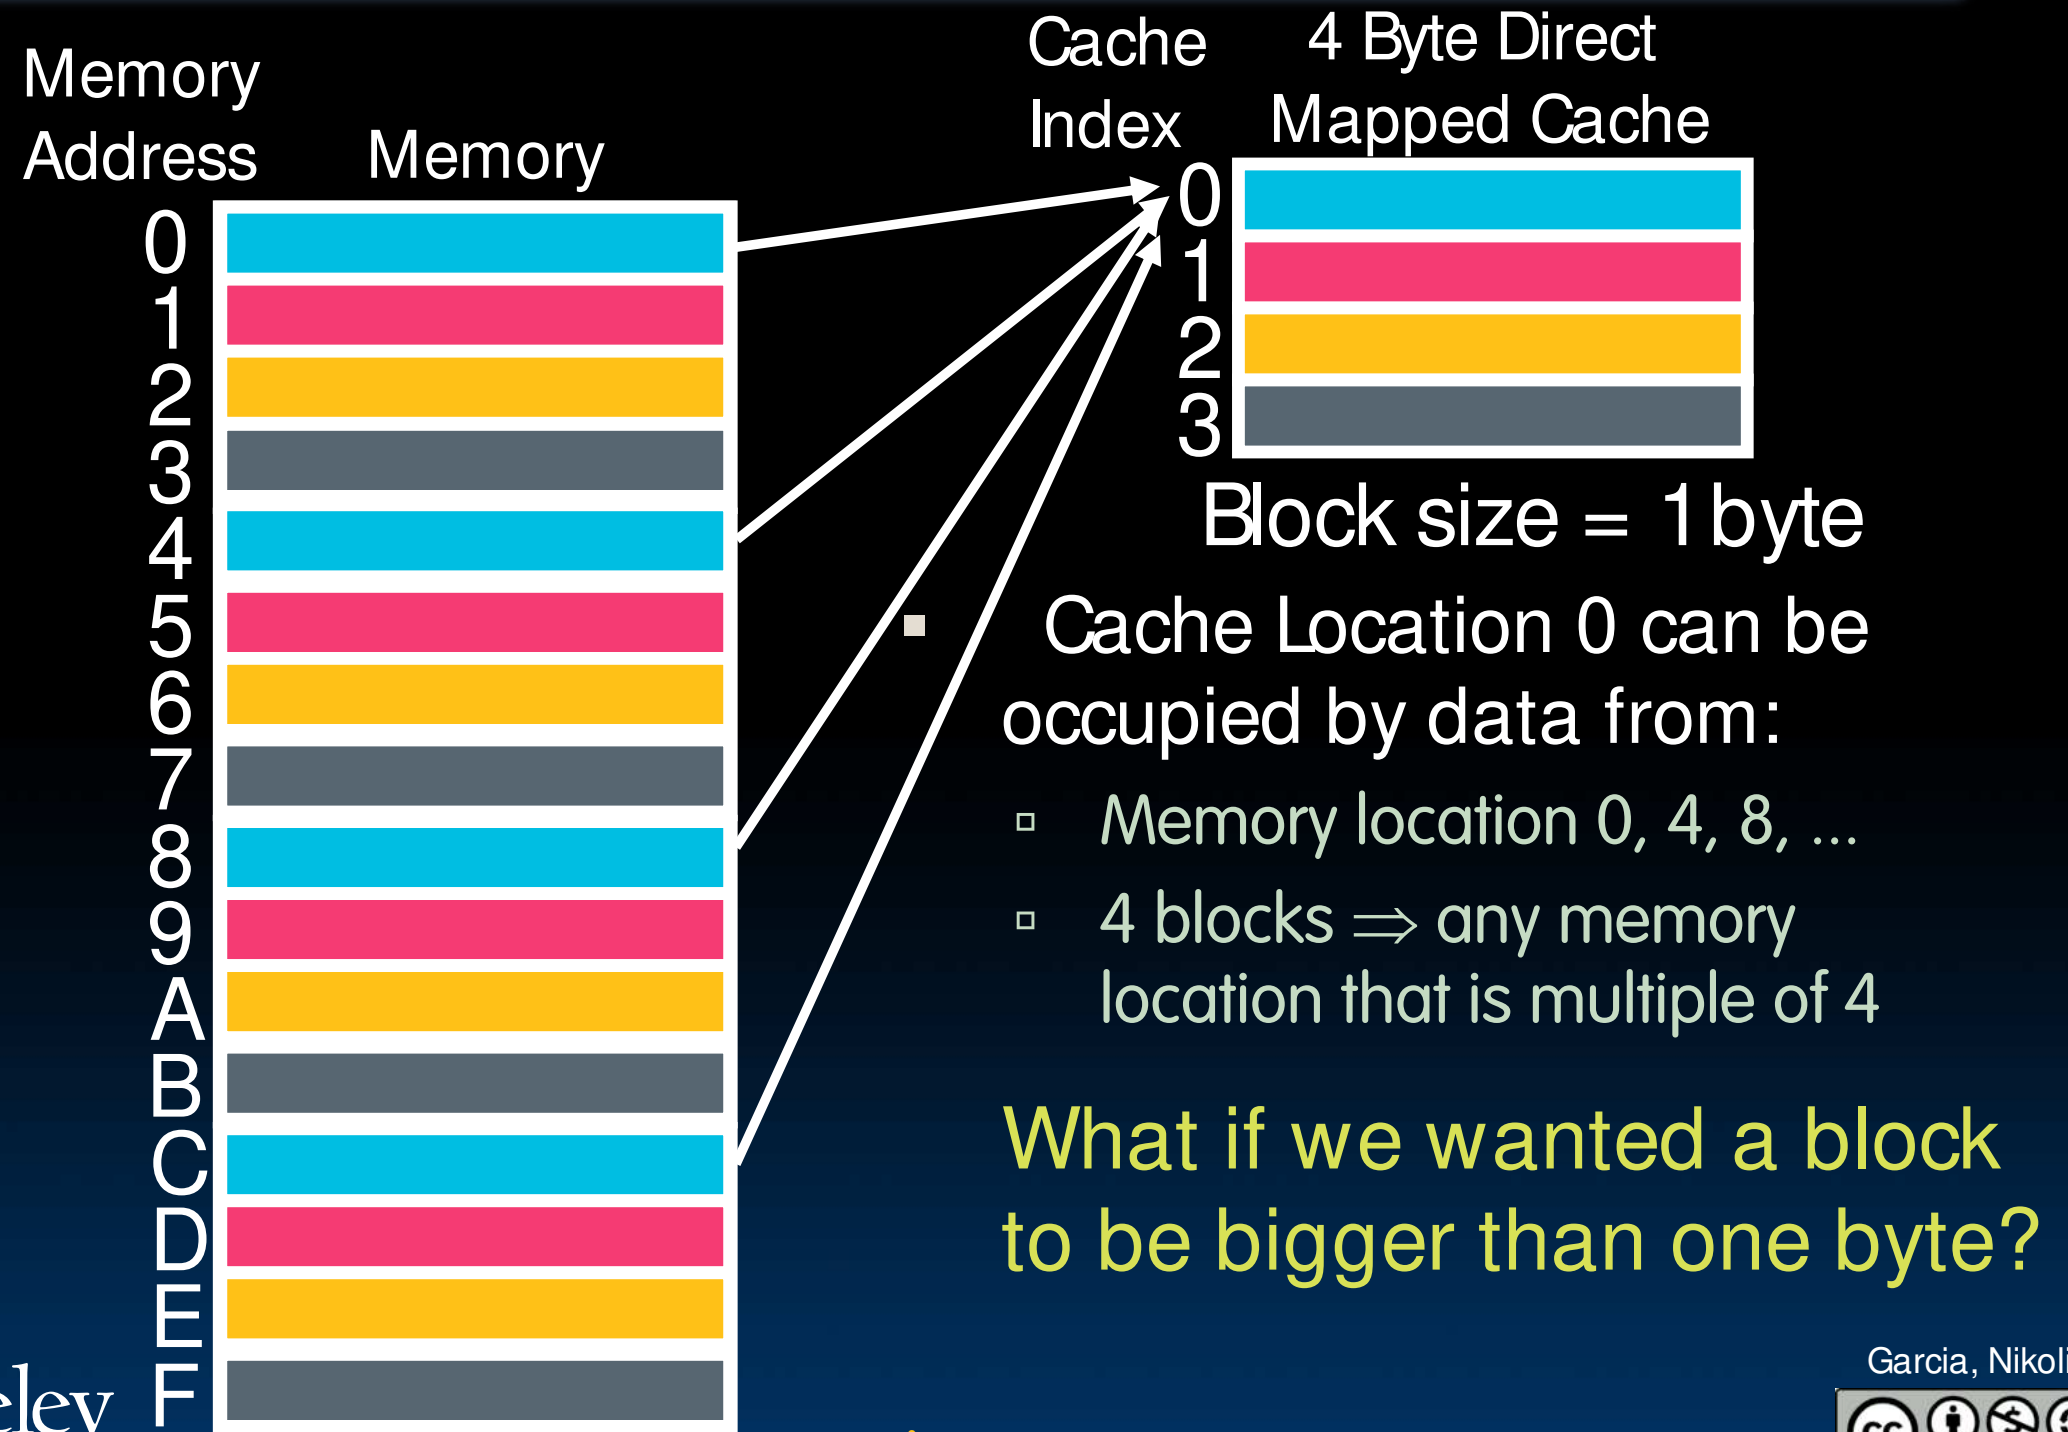

Direct-Mapped Cache (2/4)

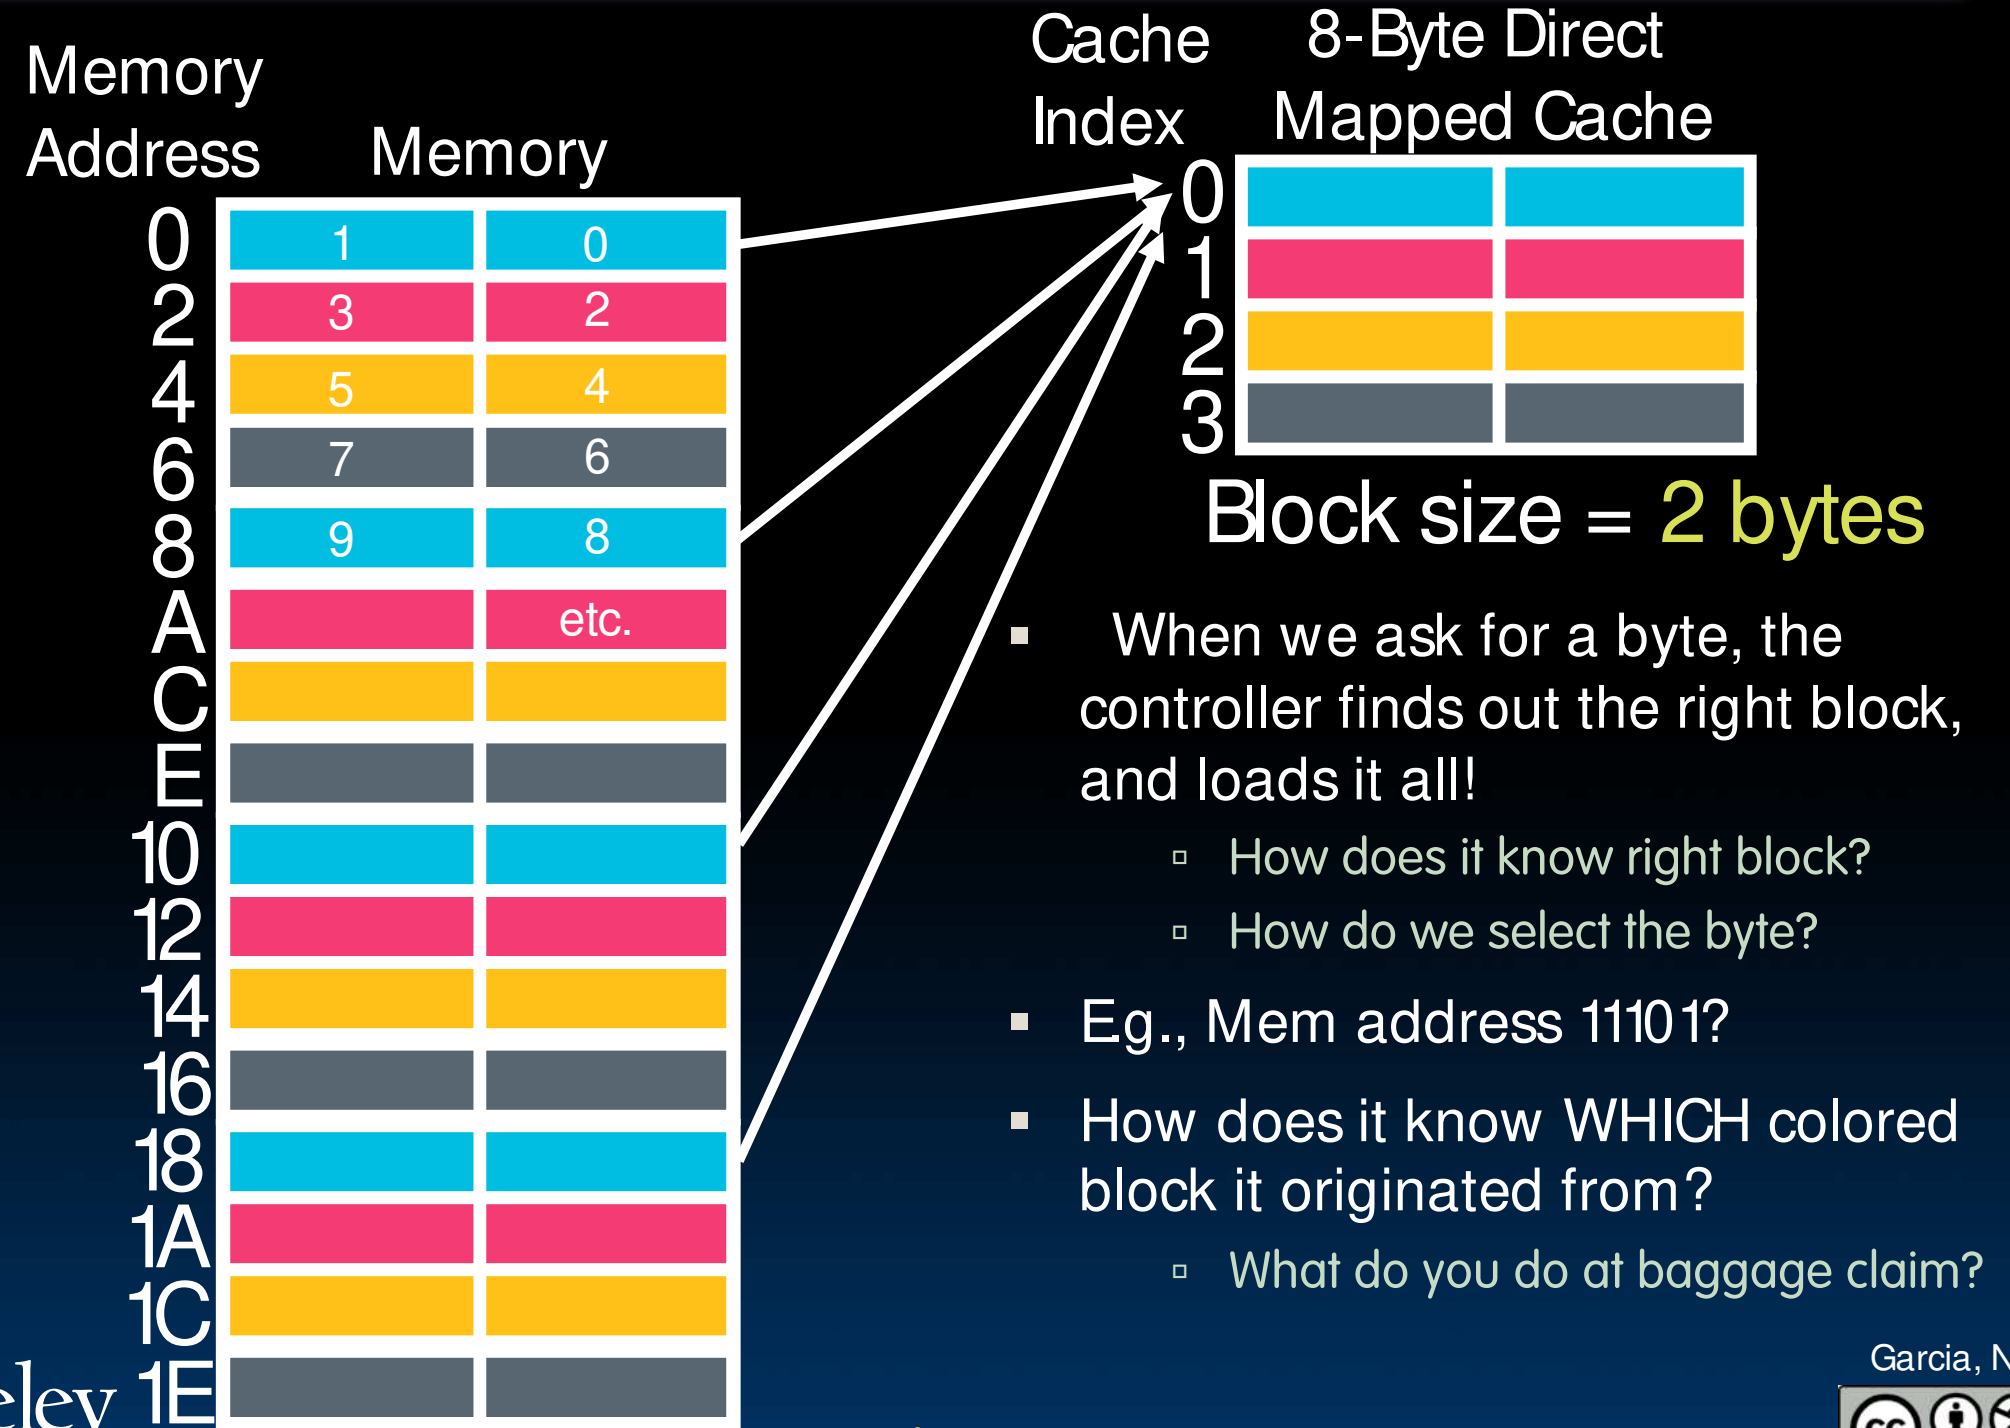

Direct-Mapped Cache (2/4)

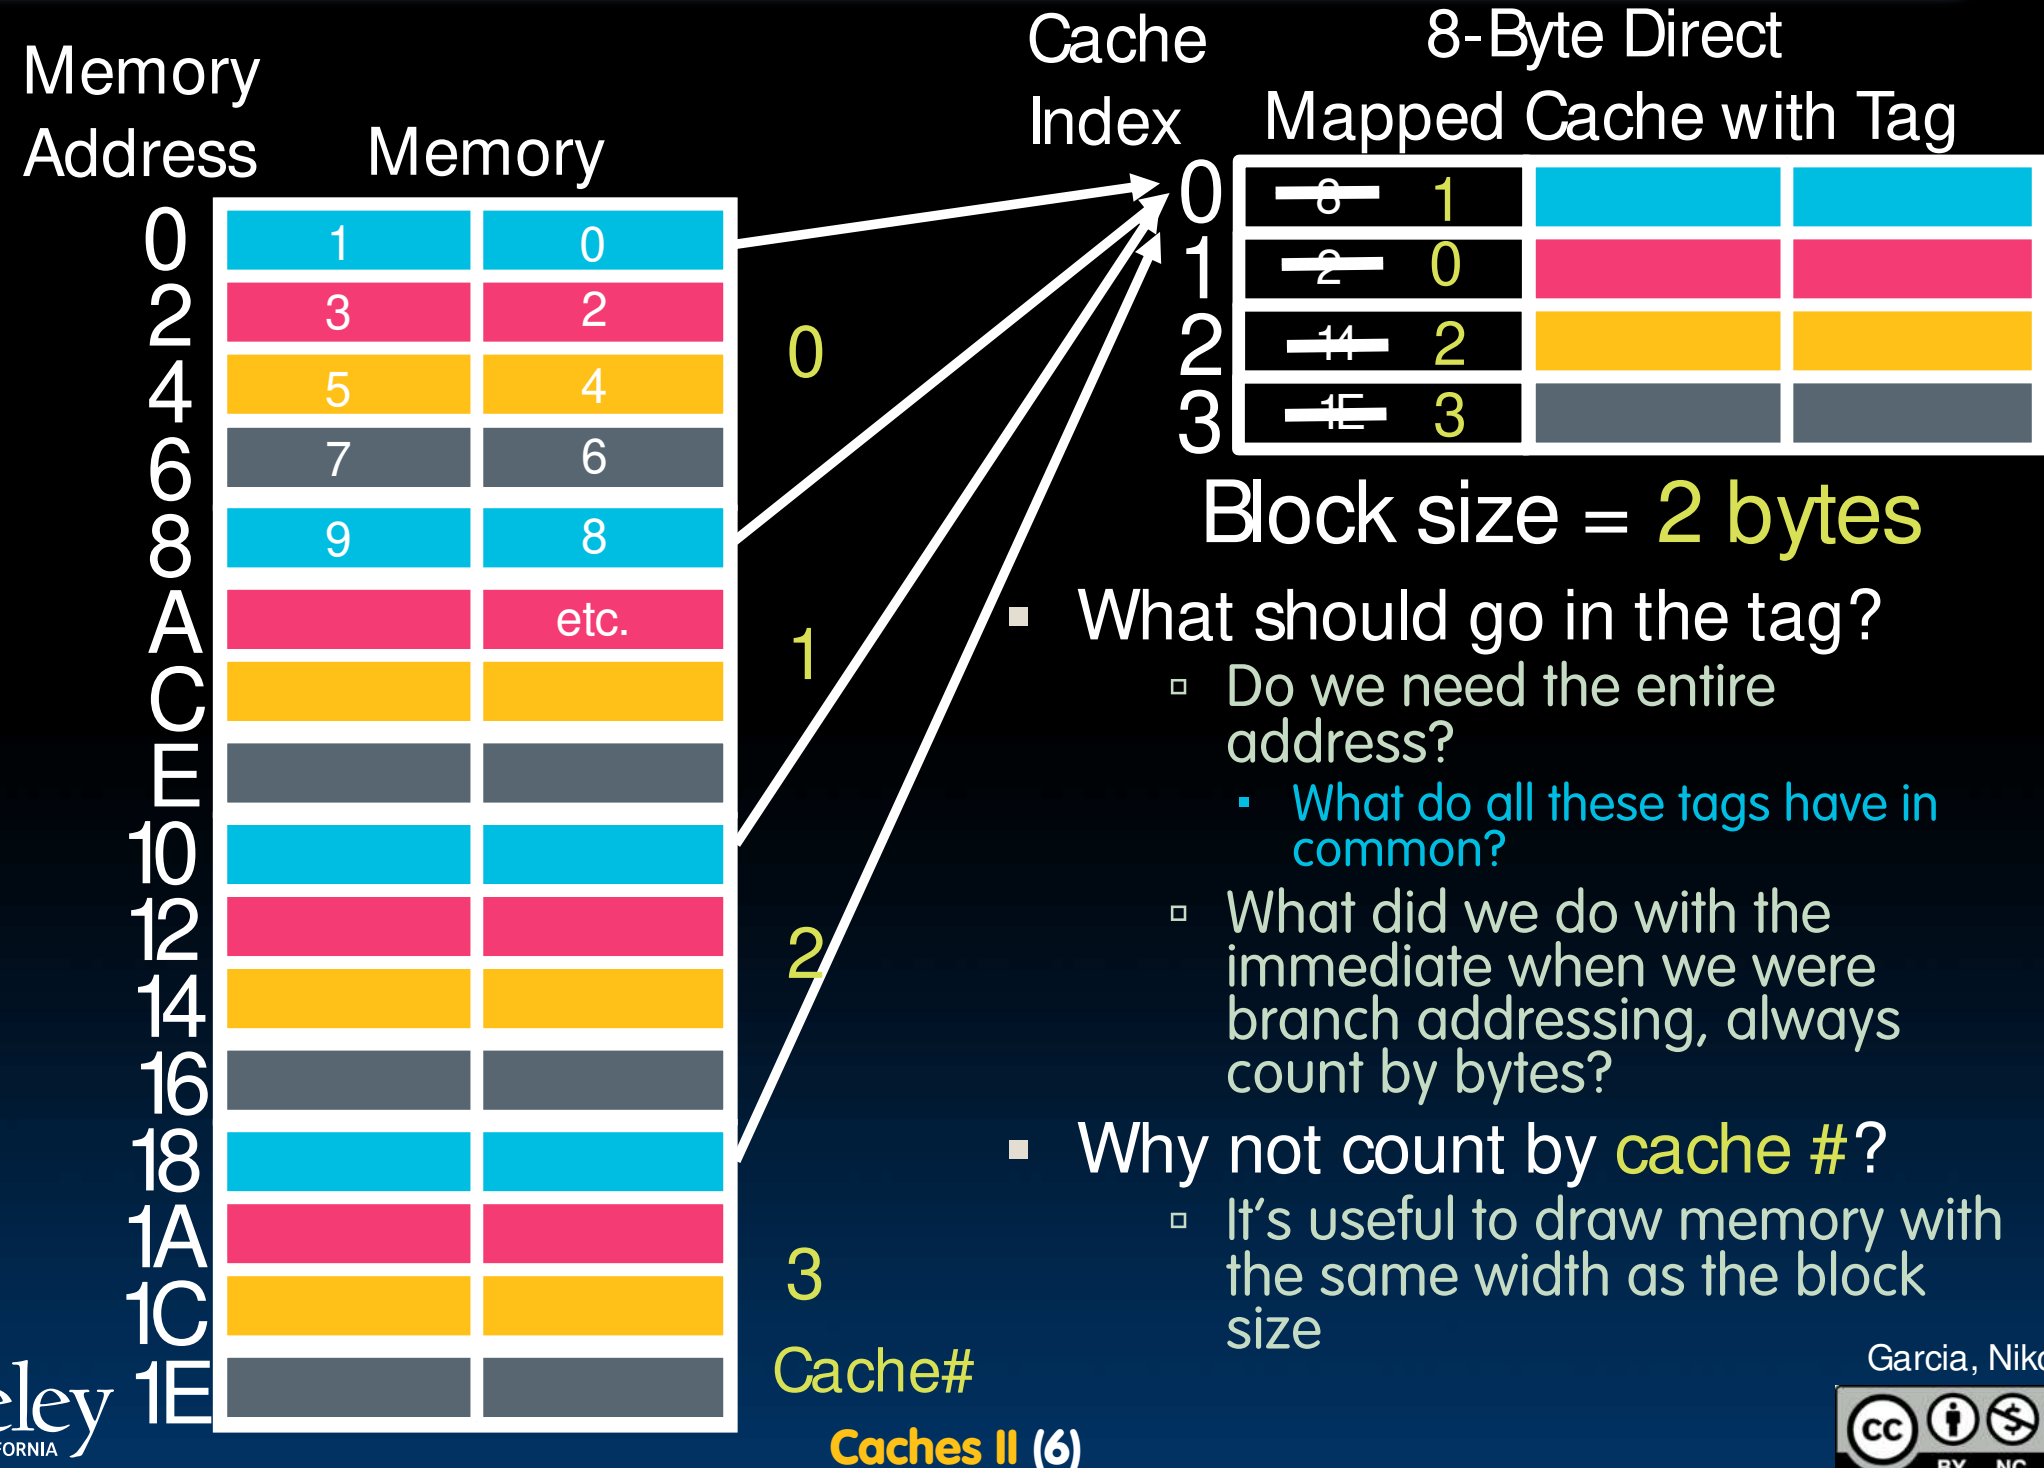



- | | | |
|---|--------------------------------|-----------------------------------|
| ttttttttttttttttttt | iiiiiiiiiii | oooo |
| tag
to check
if have
correct block | index
to
select
block | byte
offset
within
block |



Direct-Mapped Cache Terminology

- All fields are read as unsigned integers.
- **Index**
 - specifies the cache index (which “row”/block of the cache we should look in)
- **Offset**
 - once we’ve found correct block, specifies which byte within the block we want
- **Tag**
 - the remaining bits after offset and index are determined; these are used to distinguish between all the memory addresses that map to the same location




I/O Cache Mnemonic (Thanks Uncle Dan!)

AREA (cache size, B)
= HEIGHT (# of blocks)
* WIDTH (size of one block, B/block)

$$2^{(H+W)} = 2^H * 2^W$$

Tag	Index	Offset
-----	-------	--------

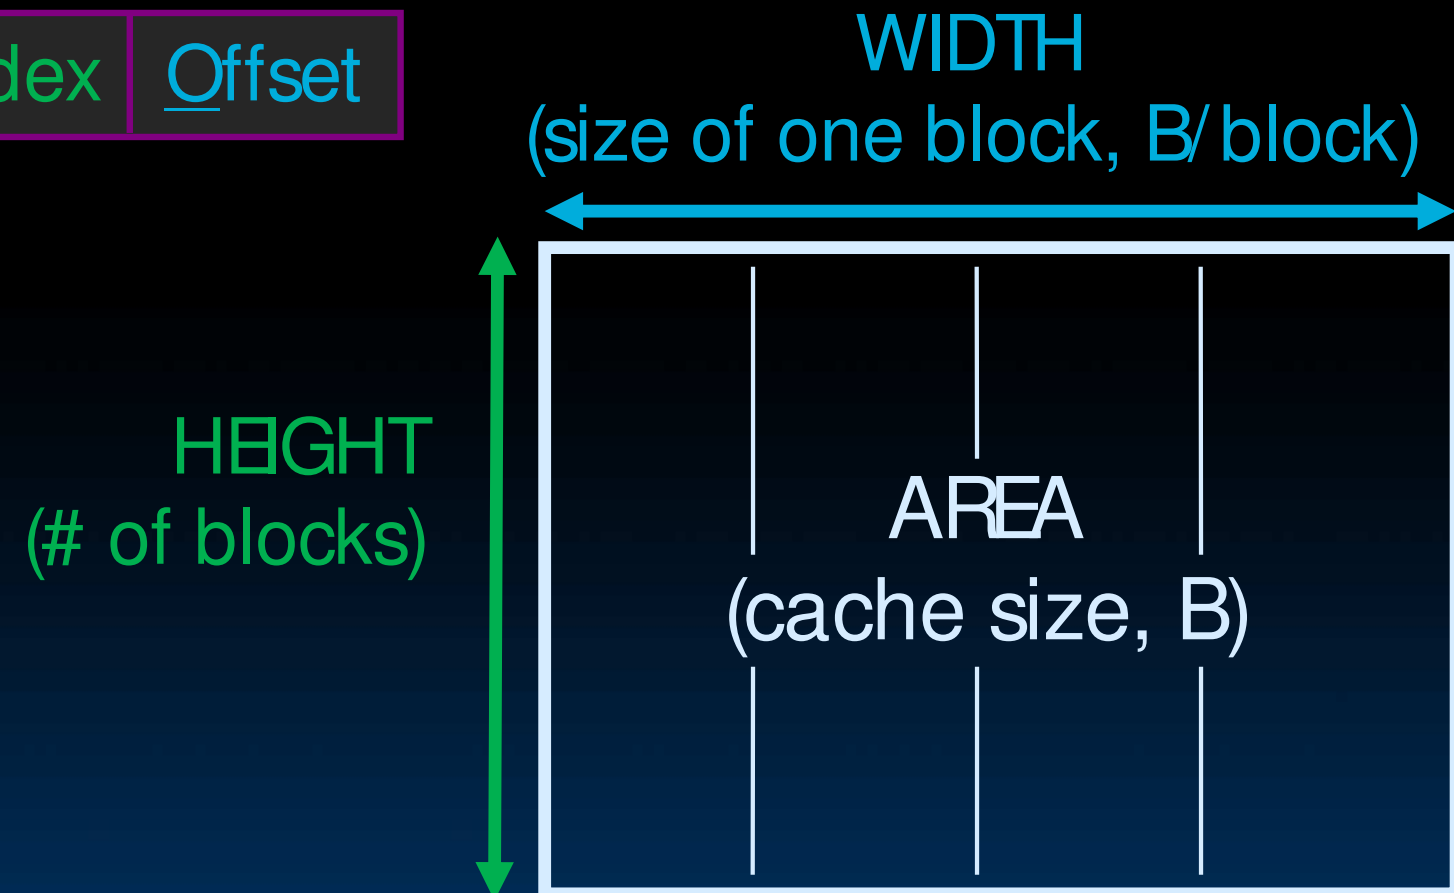

Direct Mapped Example



Direct-Mapped Cache Example (1/3)

- Suppose we have a 8B of data in a direct-mapped cache with 2-byte blocks
 - Sound familiar?
- Determine the size of the tag, index and offset fields if using a 32-bit arch (RV32)
- Offset
 - need to specify correct byte within a block
 - block contains 2 bytes
 - $= 2^1$ bytes
 - need 1 bit to specify correct byte



Direct-Mapped Cache Example (2/3)

- Index: (~index into an “array of blocks”)
 - need to specify correct block in cache
 - cache contains $8\text{ B} = 2^3\text{ bytes}$
 - block contains $2\text{ B} = 2^1\text{ bytes}$
 - # blocks/cache
 - = $\frac{\text{bytes/cache}}{\text{bytes/block}}$
 - = $\frac{2^3\text{ bytes/cache}}{2^1\text{ bytes/block}}$
 - = 2^2 blocks/cache
 - need **2 bits** to specify this many blocks



Direct-Mapped Cache Example (3/3)

- Tag: use remaining bits as tag
 - tag length = addr length – offset – index
 - $= 32 - 1 - 2 \text{ bits}$
 - $= 29 \text{ bits}$
 - so tag is leftmost **29 bits** of memory address
 - Tag can be thought of as “cache number”
- Why not full 32-bit address as tag?
 - All bytes within block need same address
 - Index must be same for every address within a block, so it's redundant in tag check, thus can leave off to save memory



Memory Access without Cache

- Load word instruction: `lw t0, 0(t1)`
- `t1` contains 1022_{ten} , `Memory[1022] = 99`
 1. Processor issues address 1022_{ten} to Memory
 2. Memory reads word at address 1022_{ten} (99)
 3. Memory sends 99 to Processor
 4. Processor loads 99 into register `t0`




Memory Access with Cache

- Load word instruction: `lw t0, 0(t1)`
- `t1` contains 1022_{ten} , `Memory[1022] = 99`
- With cache (similar to a hash)
 1. Processor issues address 1022_{ten} to Cache
 2. Cache checks to see if has copy of data at address 1022_{ten}
 - 2a. If finds a match (Hit): cache reads 99, sends to processor
 - 2b. No match (Miss): cache sends address 1022 to Memory
 - I. Memory reads 99 at address 1022_{ten}
 - II. Memory sends 99 to Cache
 - III. Cache replaces word with new 99
 - IV. Cache sends 99 to processor
 3. Processor loads 99 into register `t0`

Solving Cache problems

Tag Index Offset

- Draw memory a block wide given T I O bits, dashed word boundary lines

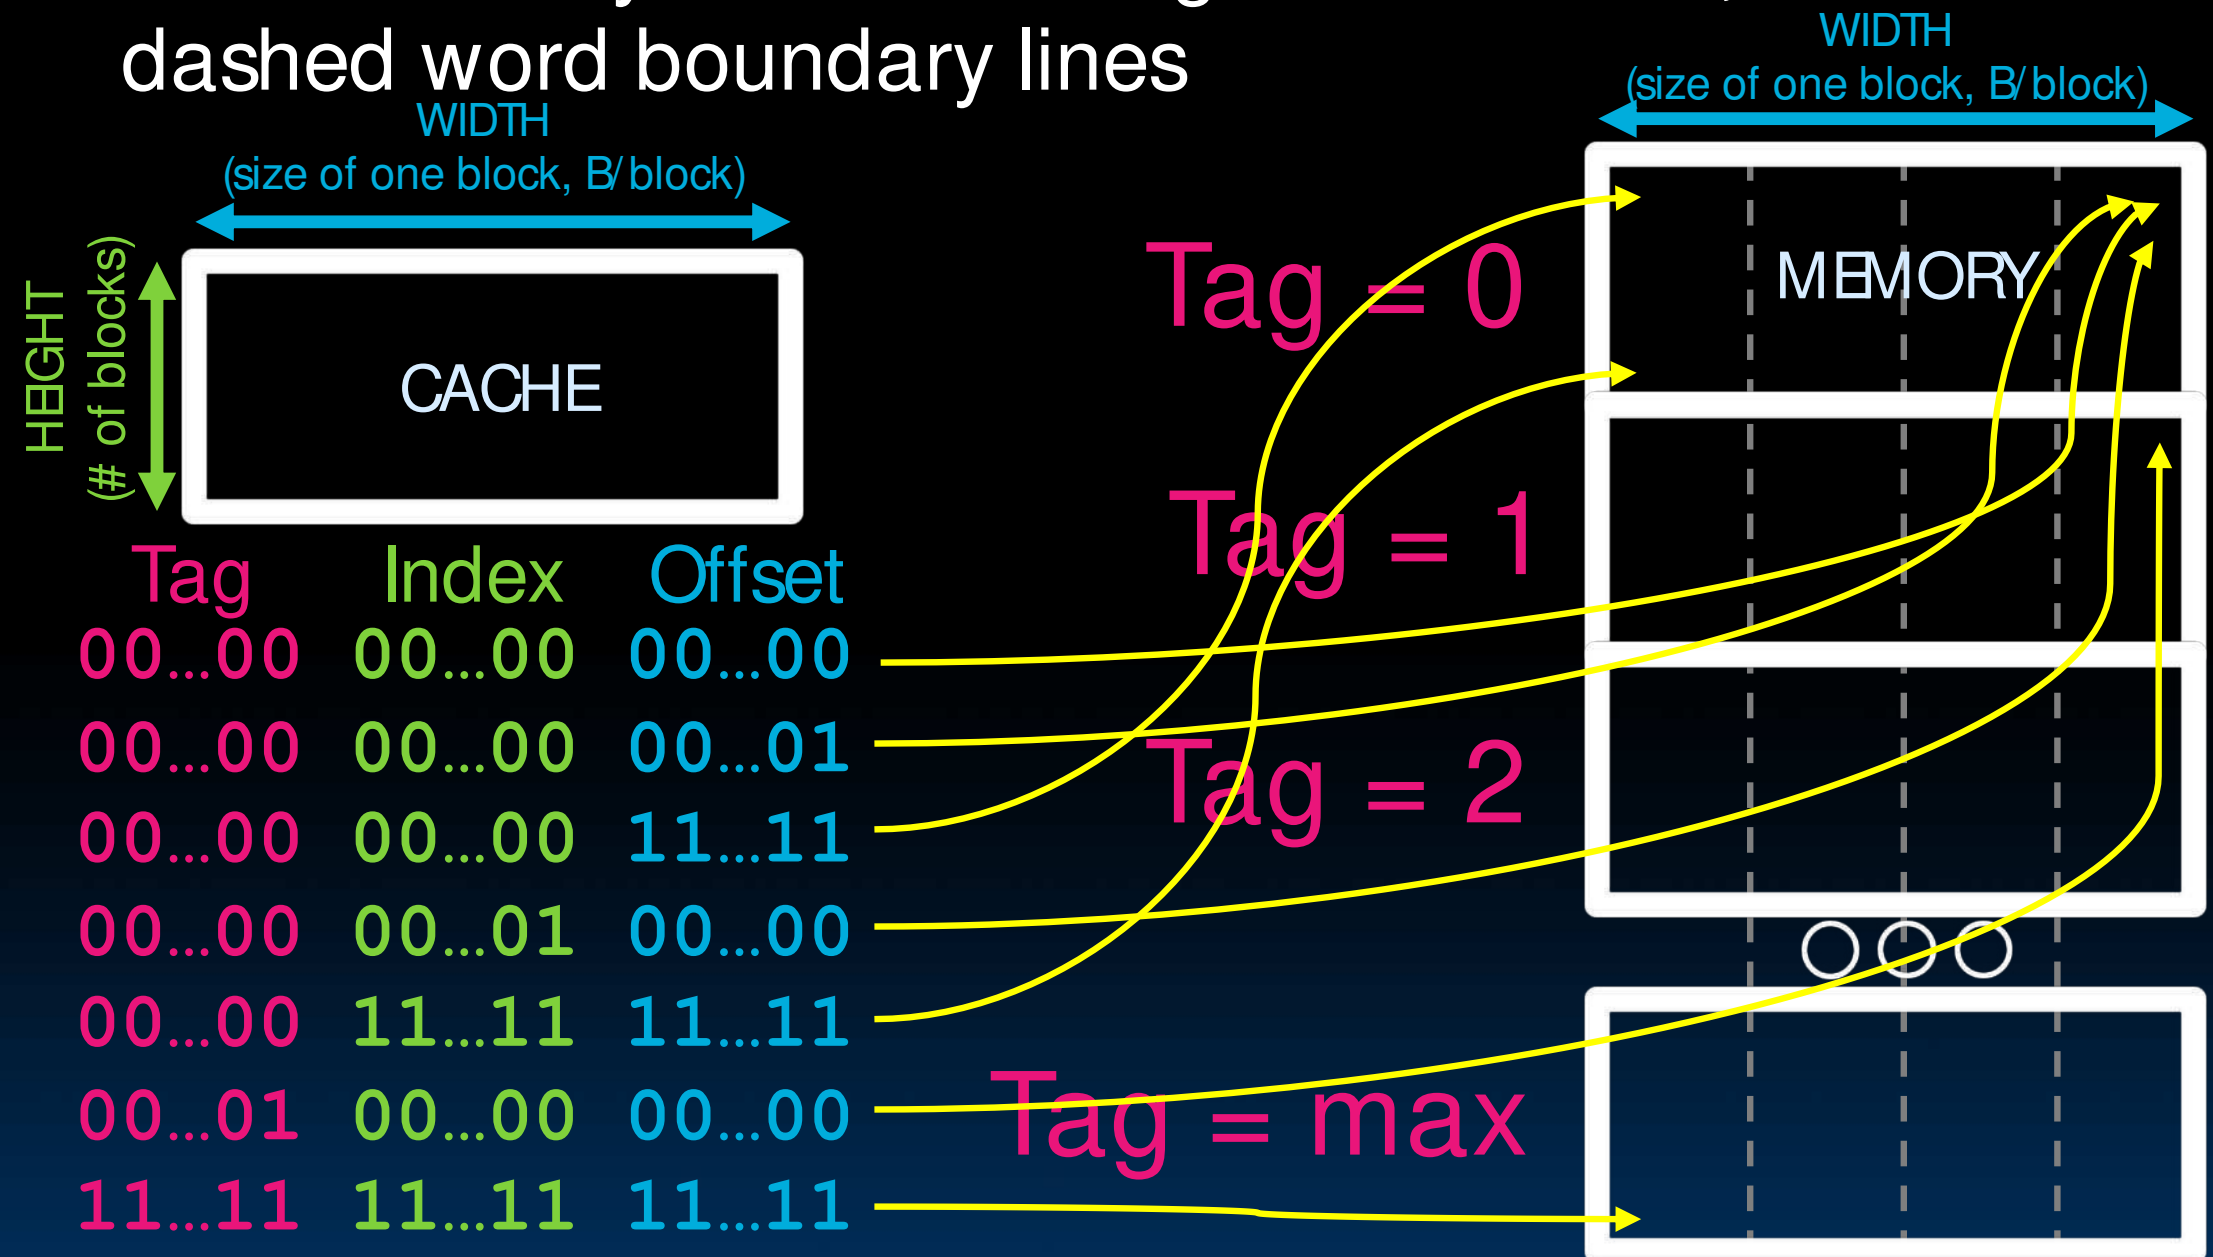

Cache Terminology



Caching Terminology

- When reading memory, 3 things can happen:
 - **cache hit:**
cache block is valid and contains proper address, so read desired word
 - **cache miss:**
nothing in cache in appropriate block, so fetch from memory
 - **cache miss, block replacement:**
wrong data is in cache at appropriate block, so discard it and fetch desired data from memory (cache always copy)



Cache Temperatures

- Cold
 - Cache empty
- Warming
 - Cache filling with values you'll hopefully be accessing again soon
- Warm
 - Cache is doing its job, fair % of hits
- Hot
 - Cache is doing very well, high % of hits



Cache Terms

- **Hit rate**: fraction of access that hit in the cache
- **Miss rate**: $1 - \text{Hit rate}$
- **Miss penalty**: time to replace a block from lower level in memory hierarchy to cache
- **Hit time**: time to access cache memory (including tag comparison)
- Abbreviation: “\$” = cache
 - ...a Berkeley innovation!



One More Detail: Valid Bit

- When start a new program, cache does not have valid information for this program
- Need an indicator whether this tag entry is valid for this program
- Add a “valid bit” to the cache tag entry
 - 0 → cache miss, even if by chance, address = tag
 - 1 → cache hit, if processor address = tag



Example: 16 KB Direct-Mapped Cache, 16B blocks

- Valid bit: determines whether anything is stored in that row (when computer initially powered up, all entries invalid)

<u>Valid</u>					
Index	Tag	0xc-f	0x8-b	0x4-7	0x0-3
0	0				
1	0				
2	0				
3	0				
4	0				
5	0				
6	0				
7	0				
...			...		
1022	0				
1023	0				

Looks like a real cache, will investigate it some more!



“And in Conclusion...”

- We have learned the operation of a **direct-mapped cache**
- Mechanism for transparent movement of data among levels of a memory hierarchy
 - set of address/value bindings
 - address → index to set of candidates
 - compare desired address with tag
 - service hit or miss
- load new block and binding on miss

